
K305114MRS Single PC Multiple access CAT5 KVM Extender

The K305114MRS is a CAT5 VGA KVM Extender for one PC with multiple accesses. It includes BE-114MRS (4-port VGA with RS232 CAT5 KVM Transmitter) and BE-6305MRS (VGA with RS232 CAT5 KVM Receiver). Using advanced CAT5e cable technology, one PC can be accessed from 4 (or 8) users. The receivers can be placed up to 150 meters away from the transmitter.



Features


- UTP maximum cable length: 150 meters.
- UTP Cable type: CAT5e, EIA/TIA 568B.
- Console keyboard/mouse: USB and PS2.
- Video resolution: max. 1600 x 1200 @ 60Hz depends on cable quality.
- EDID: Learning from BE-114MRS's local monitor.
- ◆ RS-232: 9600, 8-n-1, non flow control.
- Multiple Console Access: Sharing mode and Exclusive mode.
- All BE-114MRS and BE-6305MRS are firmware upgradable.
- RJ45 pin assignments: straight through pin-to-pin, with pairing.

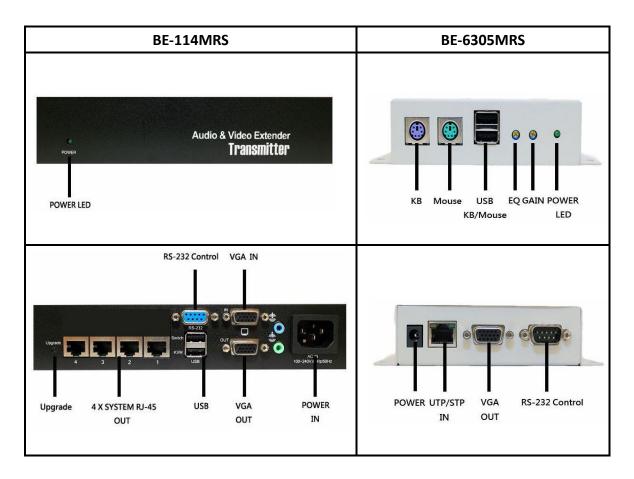

Specification

K305114MRS			
Model No.		BE-114MRS	BE-6305MRS-150
		Transmitter	Receiver
System Cable		CAT5e, Solid Wire 2x4x24 AWG, standard 568B RJ-45 connector	
Connectors	System Out	4 x RJ45 Female	N/A
	System In	N/A	1 x RJ45 Female
	Keyboard	N/A	1 x PS2 1 x USB Type A
	Mouse	N/A	1 x PS2 1 x USB Type A
	USB-to-PC	1 x USB Type A	N/A
	VGA In	1 x HDD15 Female	N/A
	VGA Out	1 x HDD15 Female	1 x HDD15 Female
	RS-232	1 x DB-9	1 x DB-9
	Power In:	1 x AC, 60Hz/50Hz	1 x DC Jack
Power LED		1 (Green)	
Video Gain/EQ		N/A	2 x Mini Port
Video		1600 x 1200 @ 60Hz, DDC2B	
Maximum Distance		Depends CAT5 cable quality. 0~150M	
Dimensions		21.3L x 13.4W x 4.4H cm	14L x 9.3W x 3.2H cm
Weight		860g	380g

Diagram

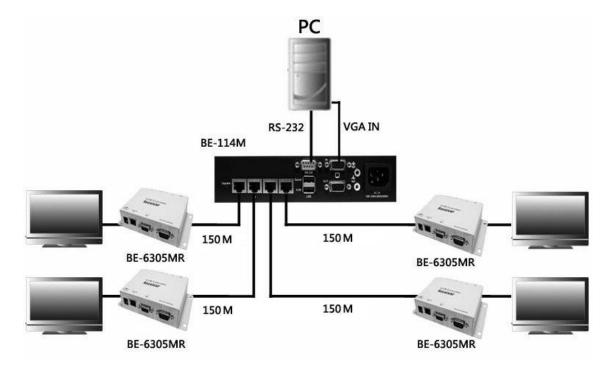

Ordering Information

BE-6305MRS-150	150m CAT5 VGA with RS232 KVM Receiver
BE-114MRS	4-port CAT5 VGA with RS232 KVM Transmitter
BE-118MRS	8-port CAT5 VGA with RS232 KVM Transmitter